
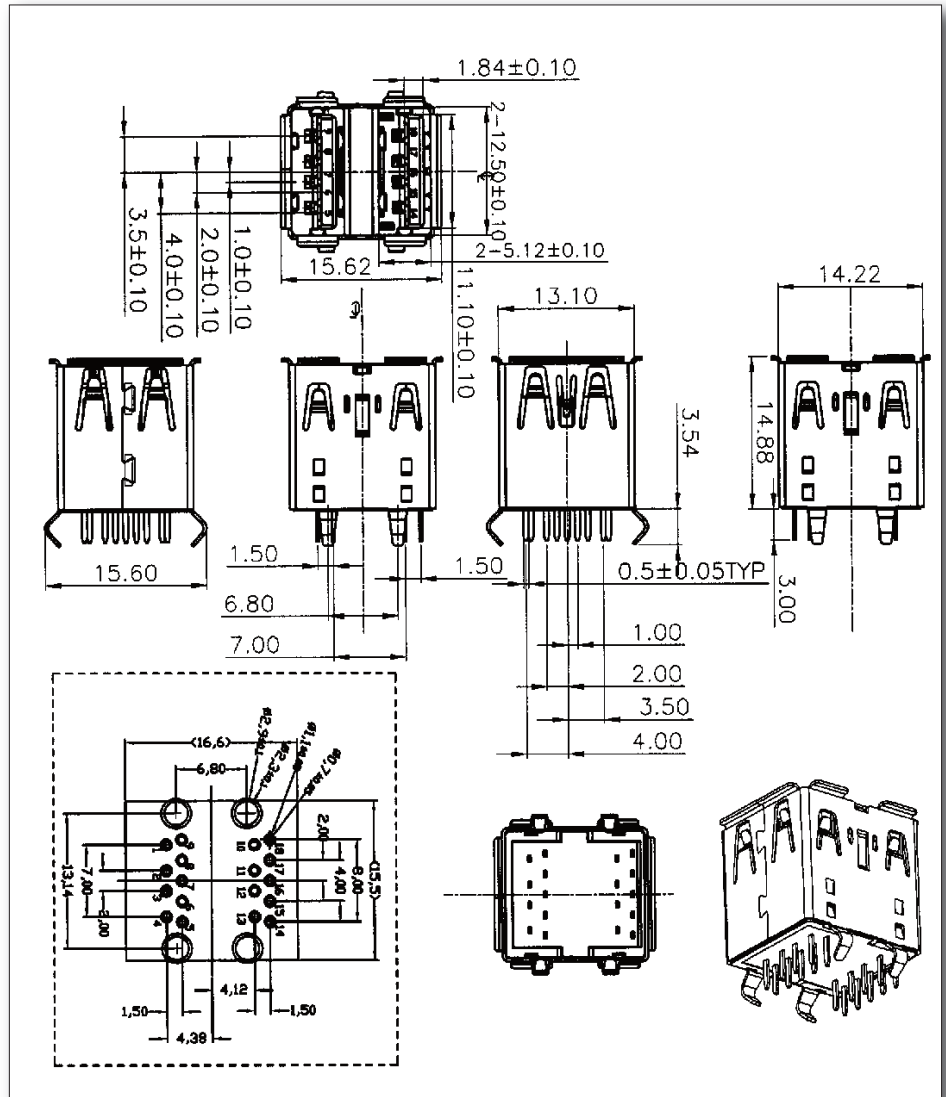


USB3 Through Board vertical Mount Dual A-Type Receptacle
VUSB3-A-D-G-TB-V Series

Approved UBSB3.0 standard with blue plastic insert
Gold (15 micron) plated contact and tin plated shells
Mates with USB3 A-Type male connectors & cables

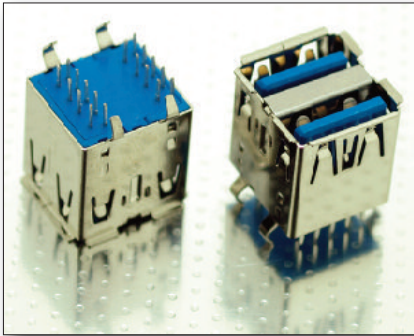

Ordering Information:

Part Number
VUSB3-A-D-G-TB-V

Specification:

Contact Material:	Phosphor Bronze (5000 cycle durability)
Contact Plating:	15 micron (u") Gold Plated
Body (Insert):	Polyester Resin UL94V-0 Rated Blue colour
Shell Material:	Copper Alloy (Ni 80u" plated min.)
Current rating:	1A
DWV:	500V AC
Voltage Rating:	30V
Insulation Resistance:	1000 MΩ Max.
Contact Resistance:	30 mΩ min.
Operating Temperature:	-25°C to +70°C
Mating Force:	35n max
Unmating Force:	10n min.