


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/18/07		LJC 08/18/07
D	DRAWING UPDATE	JLZ 05/22/19'		

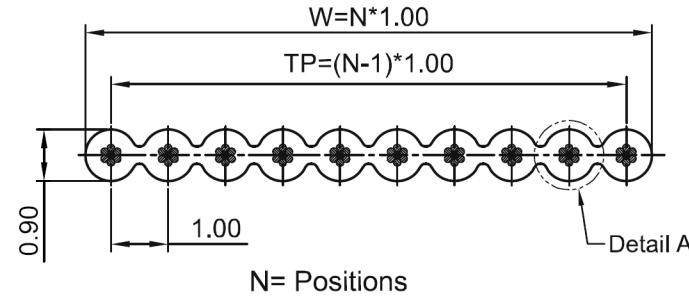


NOTES:

- Insulation material: PVC
Color: Grey
- Specification
 - Rating: 300V
 - Conductor Size: 28AWG
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature:-20°C~70°C.
- Application
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code
VFC2 - XX - 305 - G
No. of Positions
08 ~ 64

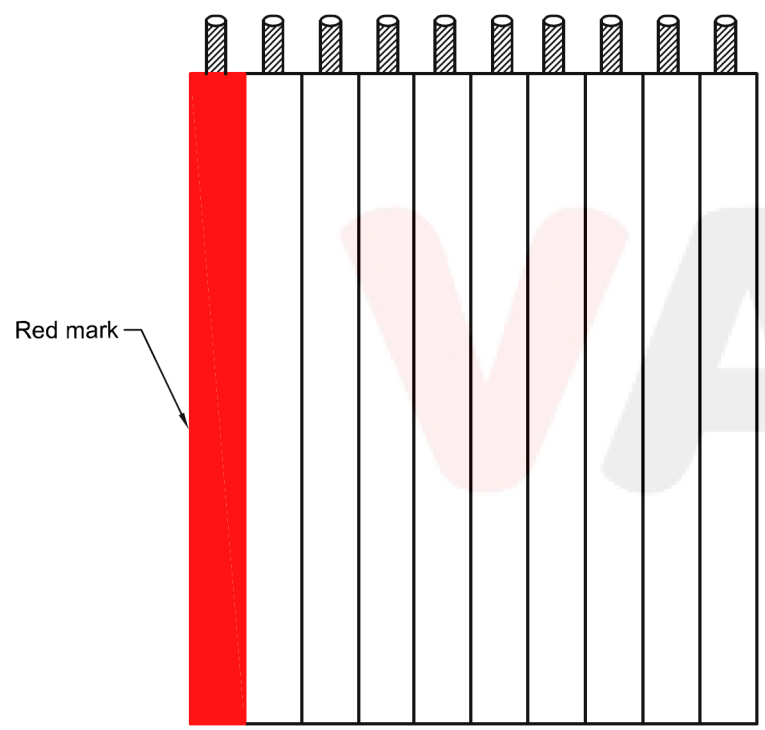

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
06	5.00	6.00	±0.30	Ø0.127<0.237
08	7.00	8.00	±0.30	
10	9.00	10.00	±0.30	
14	13.00	14.00	±0.30	
16	15.00	16.00	±0.30	
20	19.00	20.00	±0.30	
24	23.00	24.00	±0.30	
26	25.00	26.00	±0.30	
30	29.00	30.00	±0.30	
34	33.00	34.00	±0.40	
40	39.00	40.00	±0.40	
50	49.00	50.00	±0.40	
60	59.00	60.00	±0.40	
64	63.00	64.00	±0.40	

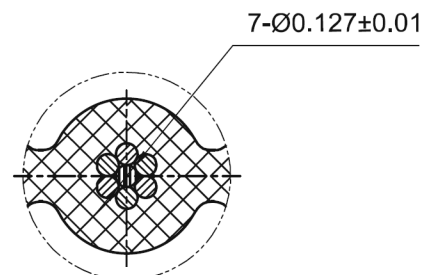

Detail A
3:1
(28AWG)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	UL 2651 PITCH 1.00mm FLAT CABLE		
X.	±0.60	X.	±5°	UNITS	mm				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	VFC2 SERIES		
.XX	±0.25	.XX	±2°	TOBY ELECTRONICS LTD sales@toby.co.uk toby.co.uk					
DRAWING TYPE		CUSTOMER							
SCALE	1:1	SHEET	1 OF 1						
DRAWING NO.		VFC2 - XX - 305 - G							