



Type 1 Compact Flash Card SMT PCB Connector CFC-1-50M Series

For Type 1 Cards

10,000 cycles (Gold plated contacts)

0.635mm Pitch PCB Contacts (Tin plated-RoHS Compliant)

Reversed Type available on request - CFC-1-50-M-R

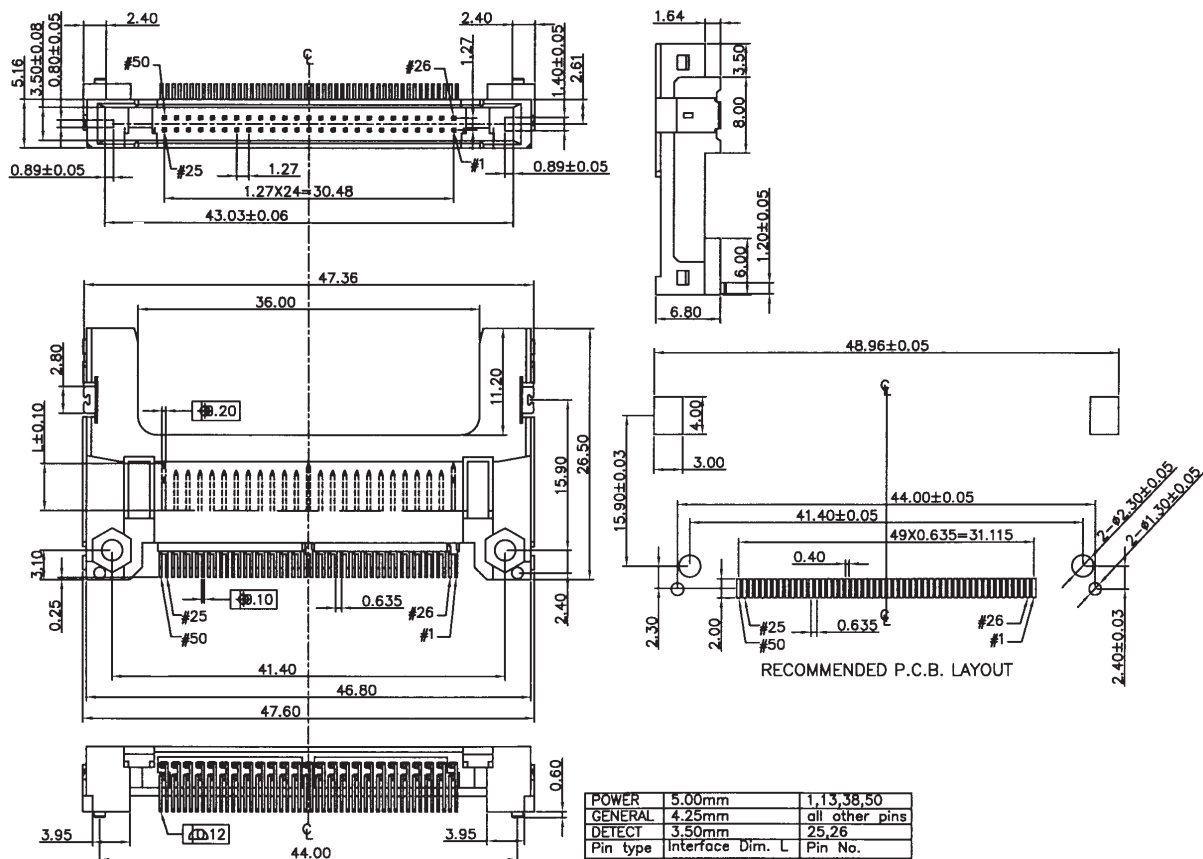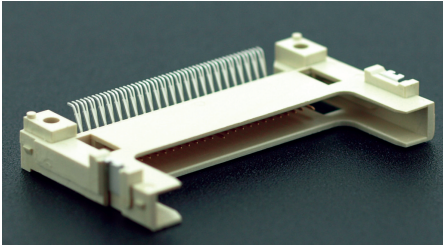

Ordering Information:

CFC-1-50M (Standard Type)

CFC-1-50-M-R (Reversed Type)

Specification for CFC-1-50M

Insulator Material:	LCP UL94V-0 Cream
Contact Material:	Phosphor Bronze
Contact Plating:	Gold flash over Ni underplate (mating contacts)
Solder Tail Plating:	Tin over Ni
Current Rating:	1A per contact
DWV:	1000AV AC for 1 minute
Insulation Resistance:	1000MΩ min.
Contact Resistance:	40mΩ Max.
Operating Temperature:	-55°C to +125°C
Mating Cycles:	10,000